

MR60-150



MR70-135



MR80-150



MR60-200



MR70-180



MR80-200



MR60-250



MR70-225



MR80-250



El precio incluye vitrina de ingredientes - *Topping unit included in price*
 Cubetas GN NO incluidas en el precio - *GN containers NOT included in price*
 ver página 442 - *see page 442*

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	pares guías slides sets	cajas containers 40x60	capacidad GN GN capacity 1/4	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
MR60-150	0°C +8°C	1495	850	600	2	0	0	6	245	230V-50Hz	R134a	178	211
											R290*	280	218
MR60-200	0°C +8°C	2020	850	600	3	0	0	9	380	230V-50Hz	R134a	245	249
											R290*	280	220
MR60-250	0°C +8°C	2545	850	600	4	0	0	12	516	230V-50Hz	R134a	304	289
											R290*	739	412
MR70-135	0°C +8°C	1345	850	700	2	2	0	5	255	230V-50Hz	R134a	178	211
											R290*	280	218
MR70-180	0°C +8°C	1795	850	700	3	3	0	8	399	230V-50Hz	R134a	245	249
											R290*	280	220
MR70-225	0°C +8°C	2245	850	700	4	4	0	10	543	230V-50Hz	R134a	304	289
											R290*	739	412
MR80-150	0°C +8°C	1495	850	800	0	8	3	6	362	230V-50Hz	R134a	178	211
											R290*	280	218
MR80-200	0°C +8°C	2020	850	800	0	13	3	9	562	230V-50Hz	R134a	245	249
											R290*	280	220
MR80-250	0°C +8°C	2545	850	800	0	18	3	12	761	230V-50Hz	R134a	304	289
											R290*	739	412

 *opcional - *optional*

Características técnicas y constructivas sujetas a variación sin previo aviso.

- **MR60** estantes interiores de alambre en acero plastificado, regulables en altura, sobre apoyos inox
- **MR70** estantes interiores GN 1/1 de alambre en acero plastificado, sobre guías de acero inox regulables en altura
- **MR80** interior con guías de acero inox, regulables en altura para parrillas, bandejas o contenedores 60x40x7 (3 en dotación)
- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera de granito, con peto trasero y laterales de 180 mm
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Expositor de ingredientes independiente, capacidad GN 1/4, incluido
- Temperatura de trabajo expositor +2°C +8°C a 32°C ambiente
- Temperatura de trabajo mesa pizza -2°C +8°C a 38°C ambiente

We reserve the right to change specifications without prior notice.

- **MR60** shelves made of plasticized steel wire, height adjustable
- **MR70** shelves made of plasticized steel wire, height adjustable
- **MR80** capacity for 60x40 shelves, containers or trays on stainless steel slides, height adjustable
- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Granite working surface with 180 mm upstands
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- GN 1/4 topping unit, included
- Topping unit operating temperature +2°C+8°C, 32°C ambient
- Pizza unit operating temperature -2°C+8°C, 38°C ambient

OPCIONES	OPTIONS	€
cerradura puerta inox	solid door lock	
motor lado izquierdo	left side engine	
set 4 ruedas	4 castors set	
set 6 ruedas	6 castors set	
cambio R134a por R290	R134a to R290	
registrador de alarmas HACCP	HACCP alarm recorder	
respaldo inox	stainless steel rear side	
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	
Sin expositor de ingredientes	Without topping unit	
Sin expositor de ingredientes	Without topping unit	

 Expositor de ingredientes, con luz
 Topping unit with light



all photos must be considered as a reference - fotografías no contractuales




GN 1/4-150




MR70-225

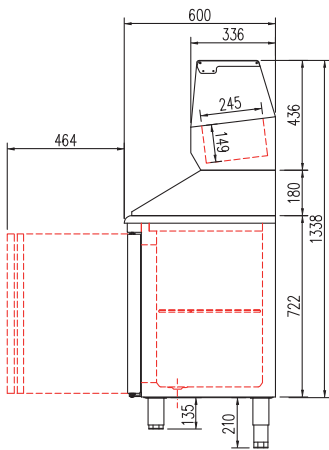

Fondo 600

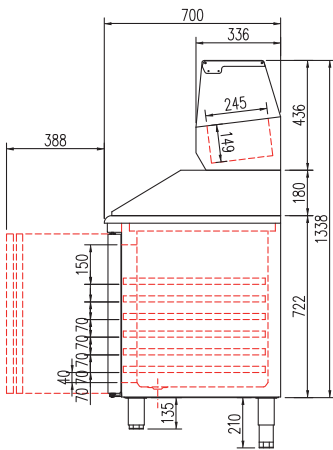

Fondo 700

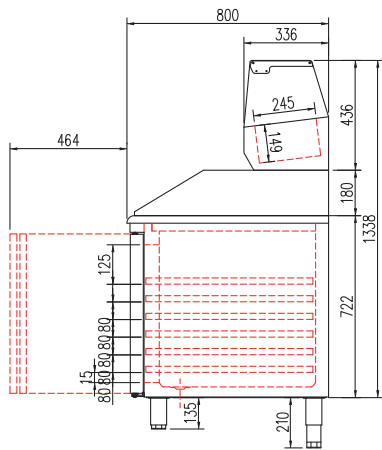

Fondo 800

MFP70:
cajones opcionales pag 40
drawers on demand, see page 40

Gama 700 GN 1/1
GN 1/1 range 700

Cajas en Gama 800
Range 800 countainers

