



Self-contained ice maker - Sprayer system
Daily production up to 25 kg

Hotel	████████████████████
Restaurant	██████████████████
Fast food	██████████████
Bar	██████████████████
Disco	██████████████████
Fish market	██████████████
Supermarket	██████████████
Medical & SPA	██████████████
Industry	██████████████

► Position n°



► Features & Plus

- Compact and crystal cube
- Tropical class +43°C
- Cleanable antiscaling filter
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- Patented sprayer slide
- Ice dispenser



Cleanable antiscaling filter



Easy cleanable internal rounded surfaces



Patented sprayer slide



Ice dispenser

► Available ice cube size



► Prod. 24h

Air temp.	Water temp.	kg	lbs		
				10° C	50° F
21° C	70° F	15° C	60° F	22	49

► Certifications available for this model






Ice Cube

HIKU 26



Self-contained ice maker - Sprayer system Daily production up to 25 kg

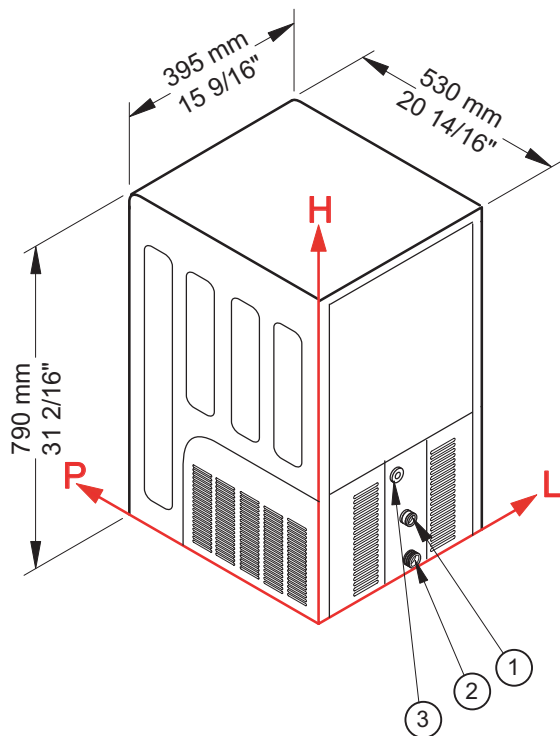

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

	Air temperature	Water temperature	Water temperature					
			7° C	45° F	15° C	60° F	21° C	70° F
	10° C	25 kg						
	50° F	55 lbs						
	21° C			22 kg				
	70° F				49 lbs			
	32° C					18 kg		
	90° F						40 lbs	

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 191 mm / 7 8/16" - 136 mm / 5 6/16" - 3/4" ② Water out.: 197 mm / 7 12/16" - 36 mm / 1 7/16" - 24 mm / 15/16"
- ③ Electrical connections: 175 mm / 6 14/16" - 211 mm / 8 5/16"

► Technical information

Production in 24h	22 kg / 49 lbs	Water consumption	A: 4,5 l/kg - 53,9 gal/100 lbs
Store capacity, up to	7 kg / 15 lbs	Sizes (L-P-H mm)	395 - 530 - 790
Cooling system	A	(L-P-H ")	15 9/16 - 20 14/16 - 31 2/16
Kind of cube	D-13g	Sizes with pack (L-P-H mm)	430 - 580 - 970
Refrigerant	R404A - R452A	(L-P-H ")	16 15/16 - 22 13/16 - 38 3/16
Standard voltage	220-240 V ~ 50 Hz	Net weight	41 kg / 90 lbs
Average power consumption	250 W	Gross weight	48 kg / 106 lbs
Fuse	10 A	Finish	Polyethylene
Delivered ice	1,3 kg/min		

All the technical information must be considered at the following conditions:

Sizes without feet
Standard Cube (13 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)
Refrigerant R404A

Models and specifications are subject to change without notice

Rev. 03 - Issued May 2018



www.bremaice.it
info@bremaice.it

Bim + Data
download

