







*bar counter
line*


BARCOUNTER
LINE



900 X 550 X 885 mm



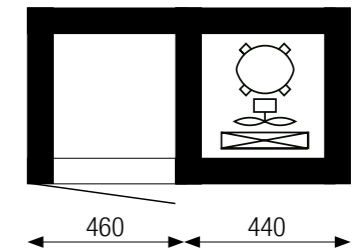

0 SBM


				
NFP	+10 / -5 °C	lam. plast.		
NFP	+10 / -5 °C	acc. inox		
NFN	+5 / -25 °C	lam. plast.		
NFN	+5 / -25 °C	acc. inox		



1110 X 550 X 885 mm



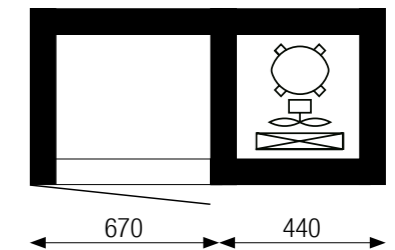

1 SBM


				
NFP	+10 / -5 °C	lam. plast.		
NFP	+10 / -5 °C	acc. inox		
NFN	+5 / -25 °C	lam. plast.		
NFN	+5 / -25 °C	acc. inox		



1340 X 550 X 885 mm



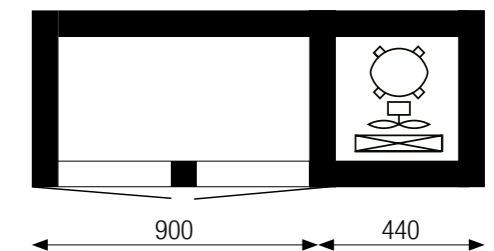

2 SBM


				
NFP	+10 / -5 °C	lam. plast.		
NFP	+10 / -5 °C	acc. inox		
NFN	+5 / -25 °C	lam. plast.		
NFN	+5 / -25 °C	acc. inox		



1340 X 550 X 885 mm

2 SBM-2T


				
CB	+5 / -25 °C +10 / -5 °C	lam. plast.		
CB	+5 / -25 °C +10 / -5 °C	acc. inox		

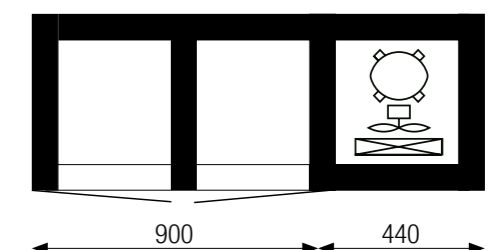

3 SBM

1780 X 550 X 885 mm


NO FROST	🔧	★	€
NFP	+10 / -5 °C	lam. plast.	
NFP	+10 / -5 °C	acc. inox	
NFN	+5 / -25 °C	lam. plast.	
NFN	+5 / -25 °C	acc. inox	

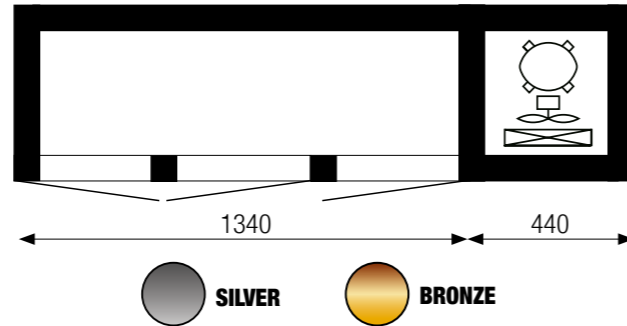

900 X 550 X 885 mm

0 SBP


NO FROST	🔧	★	€
NFP	+10 / -5 °C	lam. plast.	
NFP	+10 / -5 °C	acc. inox	
NFN	+5 / -25 °C	lam. plast.	
NFN	+5 / -25 °C	acc. inox	

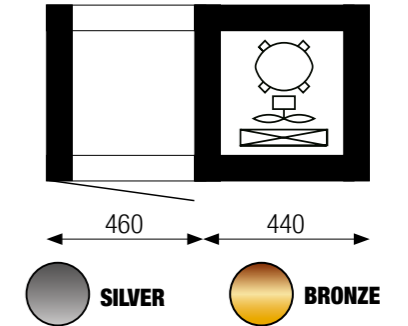

3 SBM-2T

1780 X 550 X 885 mm


NO FROST	🔧	★	€
CB	+5 / -25 °C +10 / -5 °C	lam. plast.	
CB	+5 / -25 °C +10 / -5 °C	acc. inox	

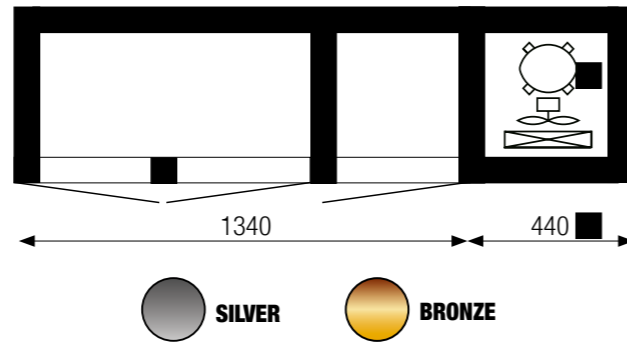

1110 X 550 X 885 mm

1 SBP


NO FROST	🔧	★	€
NFP	+10 / -5 °C	lam. plast.	
NFP	+10 / -5 °C	acc. inox	
NFN	+5 / -25 °C	lam. plast.	
NFN	+5 / -25 °C	acc. inox	

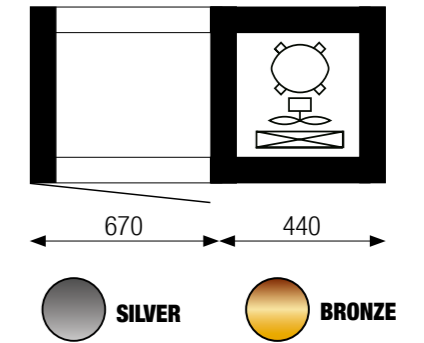

4 SBM

2220 X 550 X 885 mm


NO FROST	🔧	★	€
NFP	+10 / -5 °C	lam. plast.	
NFP	+10 / -5 °C	acc. inox	
NFN	+5 / -25 °C	lam. plast.	
NFN	+5 / -25 °C	acc. inox	

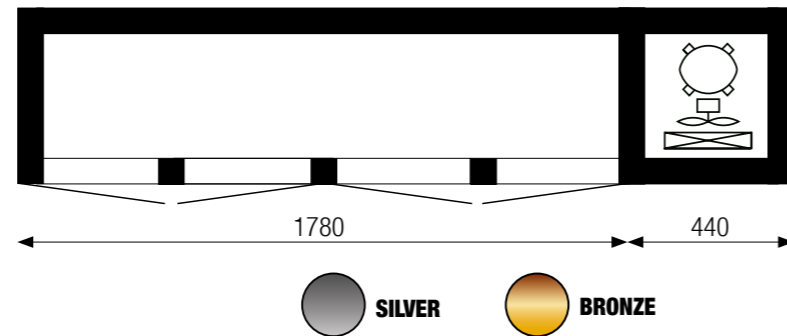

1340 X 550 X 885 mm

2 SBP


NO FROST	🔧	★	€
NFP	+10 / -5 °C	lam. plast.	
NFP	+10 / -5 °C	acc. inox	
NFN	+5 / -25 °C	lam. plast.	
NFN	+5 / -25 °C	acc. inox	

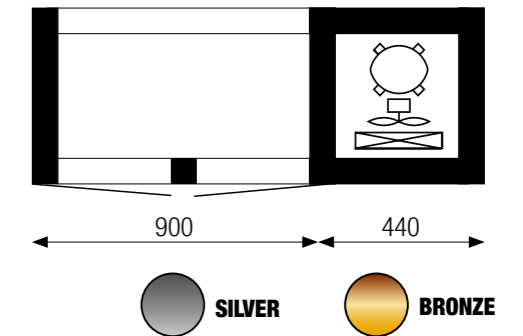

4 SBM-2T

2220 X 550 X 885 mm


NO FROST	🔧	★	€
CB	+5 / -25 °C +10 / -5 °C	lam. plast.	
CB	+5 / -25 °C +10 / -5 °C	acc. inox	

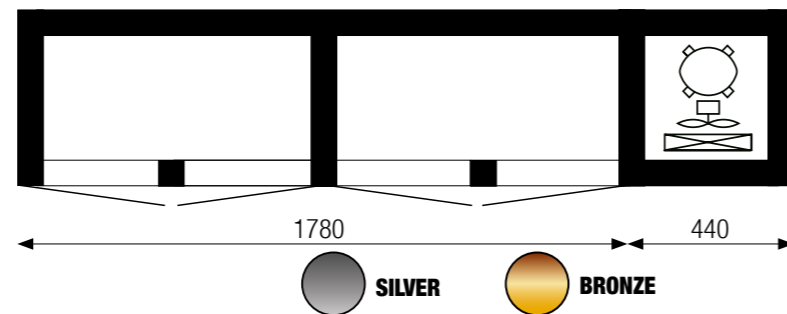

1340 X 550 X 885 mm

2 SBP-2T


NO FROST	🔧	★	€
CB	+5 / -25 °C +10 / -5 °C	lam. plast.	
CB	+5 / -25 °C +10 / -5 °C	acc. inox	

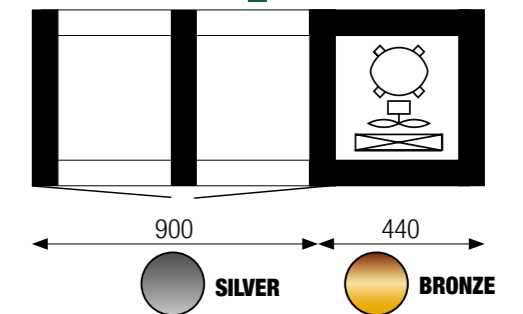

3 SBP

1780 X 550 X 885 mm


NO FROST			€
NFP	+10 / -5 °C	lam. plast.	
NFP	+10 / -5 °C	acc. inox	
NFN	+5 / -25 °C	lam. plast.	
NFN	+5 / -25 °C	acc. inox	

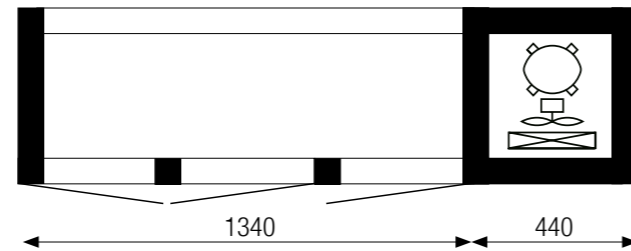

3 SBP-2T

1780 X 550 X 885 mm


NO FROST			€
CB	+5 / -25 °C +10 / -5 °C	lam. plast.	
CB	+5 / -25 °C +10 / -5 °C	acc. inox	

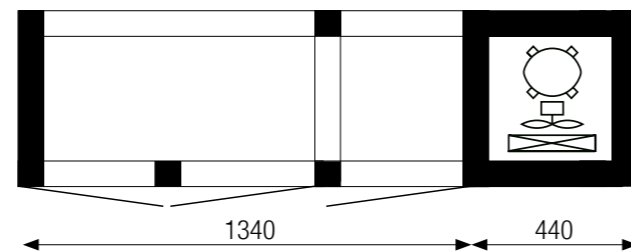

4 SBP

2220 X 550 X 885 mm

NO FROST			€
NFP	+10 / -5 °C	lam. plast.	
NFP	+10 / -5 °C	acc. inox	
NFN	+5 / -25 °C	lam. plast.	
NFN	+5 / -25 °C	acc. inox	

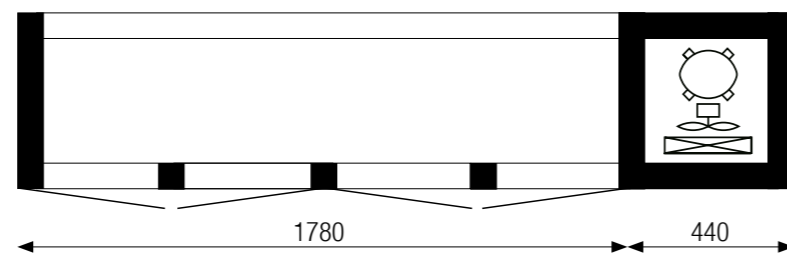

4 SBP-2T

2220 X 550 X 885 mm

NO FROST			€
CB	+5 / -25 °C +10 / -5 °C	lam. plast.	
CB	+5 / -25 °C +10 / -5 °C	acc. inox	

