



MFP70-180



MFP70-225



MFP80-200



MFP80-250

El precio incluye vitrina de ingredientes - *Topping unit included in price*
Cubetas GN NO incluidas en el precio - *GN containers NOT included in price*
ver página 387- see page 387

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	pares guías slides sets	cajas containers 40x60	capacidad GN GN capacity 1/4	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
MFP70-180	0°C +8°C	1795	850	700	2	2	0	8	255	230V-50Hz	R134a*	178	211
											R290	502	235
MFP70-225	0°C +8°C	2245	850	700	3	3	0	10	399	230V-50Hz	R134a*	245	249
											R290	502	238
MFP80-200	0°C +8°C	2020	850	800	0	10	5	9	362	230V-50Hz	R134a*	178	211
											R290	502	235
MFP80-250	0°C +8°C	2545	850	800	0	15	5	12	562	230V-50Hz	R134a*	245	249
											R290	502	238

*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera de granito, con peto trasero y laterales de 180 mm
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Expositor de ingredientes independiente, capacidad GN 1/4, incluido
- Temperatura de trabajo 32°C ambiente

MFP70

- Cuerpo cajonero neutro, 4 cajones sobre guías telescópicas desmontables, contenedores no incluidos
- Estantes interiores GN 1/1 de alambre en acero plastificado, regulables en altura

MFP80

- Interior con guías de acero inox, regulables en altura para parrillas, bandejas o contenedores 60x40
- Cuerpo cajonero neutro, 4 cajones sobre guías telescópicas desmontables, capacidad 60x40, 5 contenedores incluidos

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Granite working surface with 180 mm upstands
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- GN 1/4 topping unit, included
- Operating temperature 32°C ambient

MFP70

- Ambient drawers, 4 removable drawers on telescopic rails, containers not included
- GN 1/1 shelves made of plasticized steel wire, height adjustable

MFP80

- Capacity for 60x40 shelves, containers or trays on stainless steel slides, height adjustable
- Ambient drawers, 4 removable drawers on telescopic rails, capacity 60x40, 5 containers included

Expositor de
ingredientes,
con luz
Topping unit with
light



OPCIONES	OPTIONS
Set 7 cajones en gama 800	7 drawers set in range 800
cerradura puerta inox	solid door lock
motor lado izquierdo	left side engine
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
Sin expositor de ingredientes	Without topping unit
cambio R290 por R134a	R290 to R134a

all photos must be considered as a reference - fotografías no contractuales

Mesa fría PIZZA cajones neutros PIZZA counter with neutral drawers


2



GN 1/4-150




MFP70-225

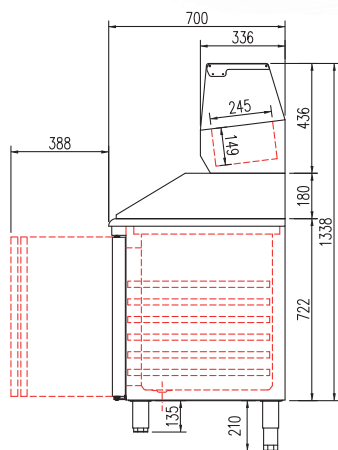

MFP70

Gama 700 GN 1/1
GN 1/1 range 700

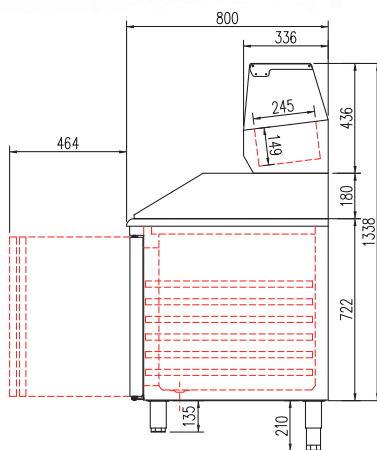

MFP80

Cajas en Gama 800
Range 800 countainers



contenedores MFP80 containers

