


TECHNICAL DATA

MODEL W081PT54

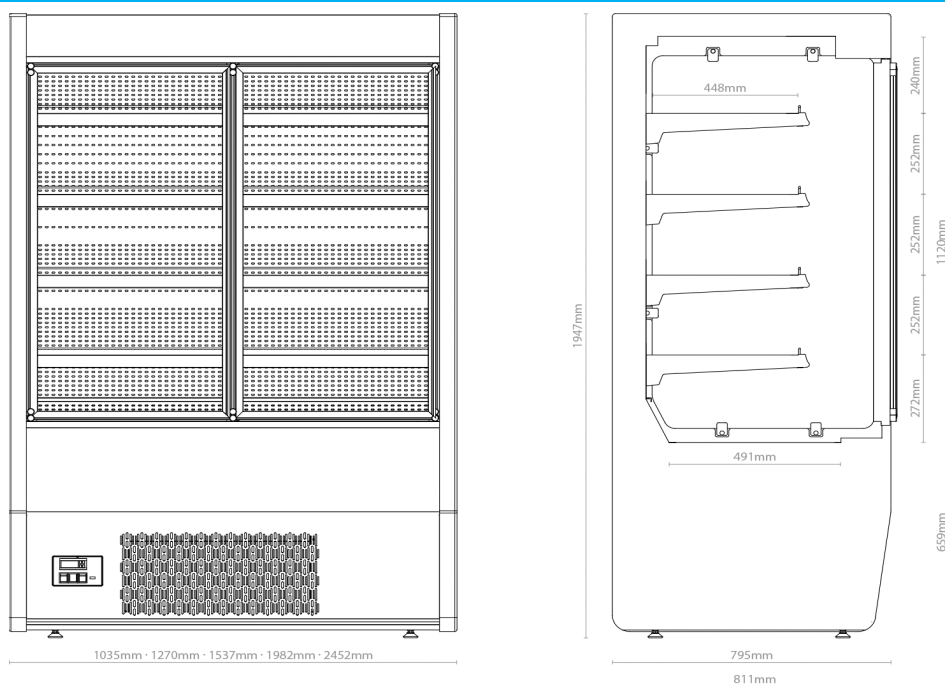

REF.			100	130	150	200	250
LENGHT (mm)	WITH SIDE PANELS		1035	1270	1537	1982	2452
	WITHOUT SIDE PANELS		945	1180	1445	1890	2360
HEIGHT (mm)			1947				
DEPTH (mm)			811				
HEIGHT OF WORKING TABLE (mm)			N/A				
HEIGHT OF EXHIBITION AREA (mm)			659				
INSTALLATION DIMENSIONS (mm) - L x H x D			1035x1947x811	1270x1947x811	1537x1947x811	1982x1947x811	2452x1947x811
SERVICE DIMENSIONS (mm) - L x H x D			1035x1947x1088	1270x1947x1088	1537x1947x1088	1982x1947x1088	2452x1947x1088
NET WEIGHT (kg)			203	215	235	335	450
NET VOLUME (dm³)			425	531	650	850	1062
TDA (Total Display Area) (m²)			1,44	1,72	1,96	2,48	3,44
REFRIGERATED SHELF AREA (m²)			2,13	2,65	3,25	4,25	5,30
MAXIMUM WEIGHT PER SHELF (Kg/m²)			160				
CLASSIFICATION			IVC2				
OPERATING TEMPERATURE (°C)			0 °C / +4 °C				
M-PACKAGE TEMPERATURE CLASS (UNDER ENVIRONMENTAL CONDITIONS 25°C / 60% RH)			3M1				
REFRIGERANT			R-404A				
TENSION (V)			AC 230 ~ / 50 Hz				
POWER (W)			1 307	1 496	1 503	1 696	
COOLING CAPACITY (W)			668	854	854	1 025	
LIGHTING			LED				
ELECTRICAL CURRENT INTENSITY (A)			6,60	6,80	6,90	8,50	
TEC (TOTAL ENERGY CONSUMPTION) kWh / 24h			12,1	13,8	14,3	17,2	
AEC (ANNUAL ENERGY CONSUMPTION) kWh / annum			4 417	5 037	5 219	6 278	
COMPRESSOR			Tecumseh (L'Unité Hermetique) / Secop (Danfoss)				
CONTROLLER			Carel / Dixell / Danfoss				
EVAPORATOR			CENTAURO CENTAURO				
FANS			EBM PAPST / ELCO				